

RM Series Oil-Flooded Rotary Screw Compressors

The all-new RM high-efficiency series 7-75kW



Reliability·Efficiency·Energy-saving

The Intelligence You Need To Move Your Business Forward

Ingersoll Rand works to keep you ahead of your competition with advanced compressed air systems that boost productivity, lower operating expenses and extend equipment life. These innovations are designed into every RM-Series oil-flooded rotary screw air compressor—industry-leading airend enhancements for superior efficiency, world-class delivered capacity and exceptional reliability. All supported by unique advantages, including expert design and engineering, a comprehensive suite of support programs and life-long Ingersoll Rand-branded consumables.

RM-Series compressors. The intelligence you need—to win.

Global Presence, Local Service



Manufacturing Facilities

Buffalo, NY, US
Campbellsville, KY, US
Mocksville, NC, US
West Chester, PA, US
Curitiba, Brazil
Wasquehal, France
Oberhausen, Germany
Simmerns, Germany



Global Distribution Centers

Charlotte, NC, US
Genk, Belgium
Singapore
Shanghai, China
Wujiang, China

Efficient Operation and Powerful Information

We Start At The Core

When we made the RM-Series we started with an all-new, state-of-the-art airend, making it your best choice for performance. The new airend improves efficiency as much as 16% through several advancements, including an optimised rotor profile to help minimise operating expenses. The new rotor profile also provides world-class airflow, delivering up to 14% more than previous models. With more airflow for the same power input, your compressor requirements are smaller, reducing both investment costs and energy usage, to lower your total cost of ownership.



Knowledge Is Power



The best compressors deliver air and actionable information. That's why every RM-Series compressor includes an intelligent controller that monitors key operations and adjusts system parameters to maximise uptime and minimise energy consumption. It gives you real-time facts to make and execute informed decisions... from virtually anywhere in the world.



For Higher Energy Efficiency

Every RM series air compressor features an all-new highly efficient airend, in combination with IE3 fixed speed and ECO*-PM VSD IE5 motor technology, helping you save up to 12-30% on energy costs.

ECO (Environment, Conservation & Optimization) adopts the basic R&D concept of environmental protection, energy conservation and economy, all of which also become three qualities persistently chased by ECO PM motor, and conform to the objectives of Ingersoll Rand corporate strategy and Paris Accord.

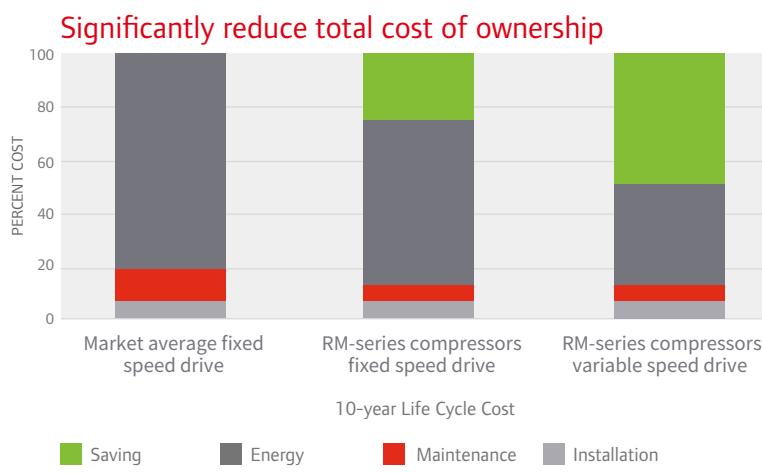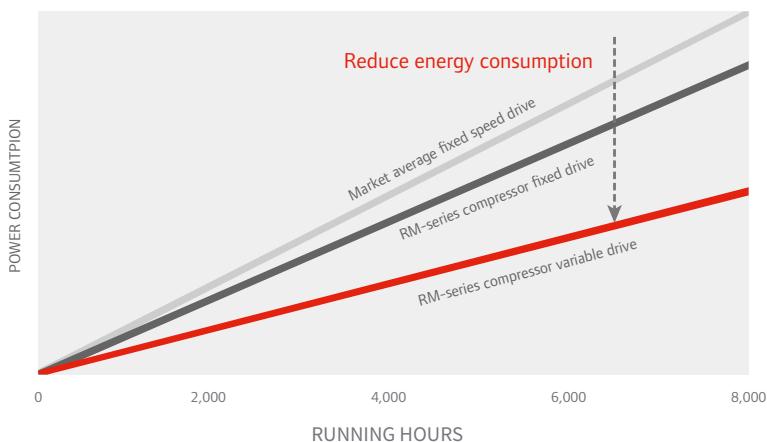

Rotary comparison at 79% average volume capacity; 4000 hours per year; 0.05\$/kWh

Optimized internal structural design



① Efficient

All-new, state-of-the-art airenrs improve efficiency as much as 16% and airflow by 34%, and are designed for long life and reliable operation.

② Reliable*

Three-stage separation system with conical baffle removes all but 3 ppm of lubricating oil from delivered air—protecting downstream equipment and extending filter life—to maximise productivity and minimise expenses.



③ Robust*

V-shield™ technology uses plane-sealed O ring that helps deliver repeatable, leak-free connections.



⑦ Intelligent

Luminance controller enables real-time system parameter monitoring, keeps you informed of compressor status and alarms to exempt you from losses due to unexpected sudden shutdown.



⑥ Reliable / Efficient / Easy to Maintain



Unwelded oil / after-cooler horizontally arranged in parallel on top of the unit decreases distortion & leakage caused by heat stress, increases reliability, extend service life, reduce maintenance work, and reduce customers' use cost during life cycle of the unit and improve their productivity.

⑤ Motor

Fixed speed drive: equipped with premium IEC60034-30 standard IE4 high-efficiency motor enables IP55 protection grade and Class F insulation with B rise.



Variable speed drive: highly efficient oil-cooled IE5 & IP66 PM motor enables Class H insulation with B rise.



④ Efficient / Superior In Productivity*

The air intake system with large-allowance inlet air and low pressure drop air filter effectively reduces inlet air pressure and improve efficiency of the unit, and reduces maintenance work and cost to facilitate the production for customers.

* There are slight differences between different product configurations. Please contact Ingersoll Rand's local customer consultants for details.

The Airend —the Heart Of Every Compressor




Air compressor use accounts for a significant part of your energy costs. Designed using advanced computer modeling techniques, our team of skilled engineers have optimized the airend to be with 16% higher efficiency, excellent airflow, lower operating noise, longer service life and higher reliability well known in the industry to operate reliably to improve your company's bottom line.

Designed for long life and reliable operation

- ① Strategically positioned lubrication points efficiently deliver oil exactly where it's needed, improving reliability and lowering power consumption.
- ② Advanced gear transmits drive power more efficiently and reliably.



Integral Gearbox

- ③ Integral gearbox reduces windage losses and drivetrain length for more efficient performance and easier serviceability.

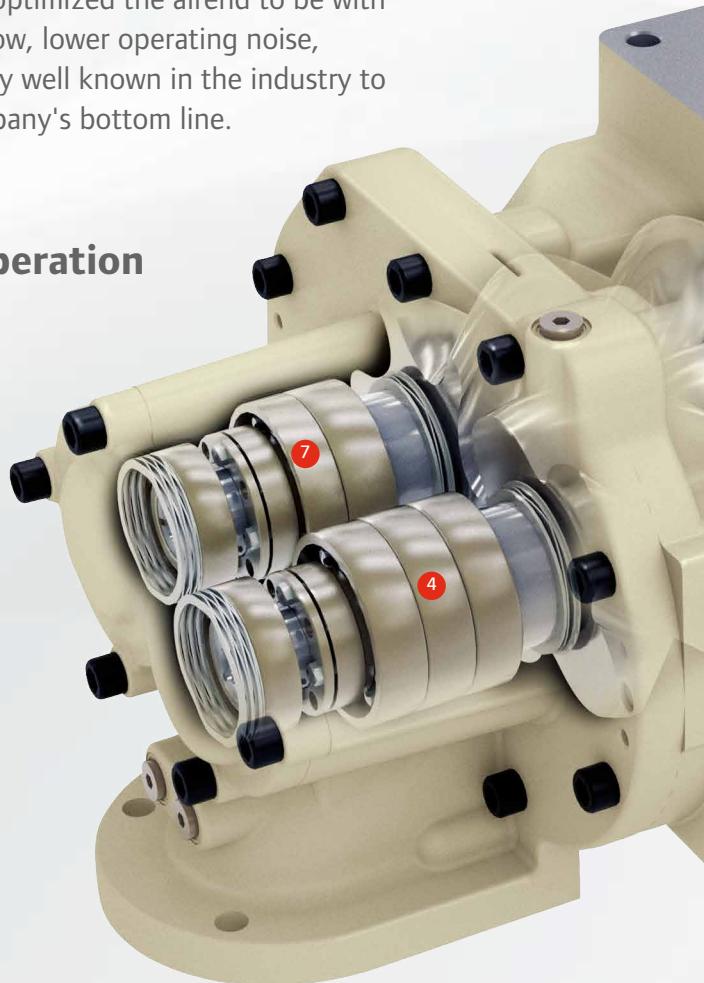

- ④ Enhanced bearing arrangement reduces resistance and improves power management for maximum reliability and performance.

- ⑤ Maintenance-free, sealed drive system requires no regular service and protects against damaging dirt and moisture.

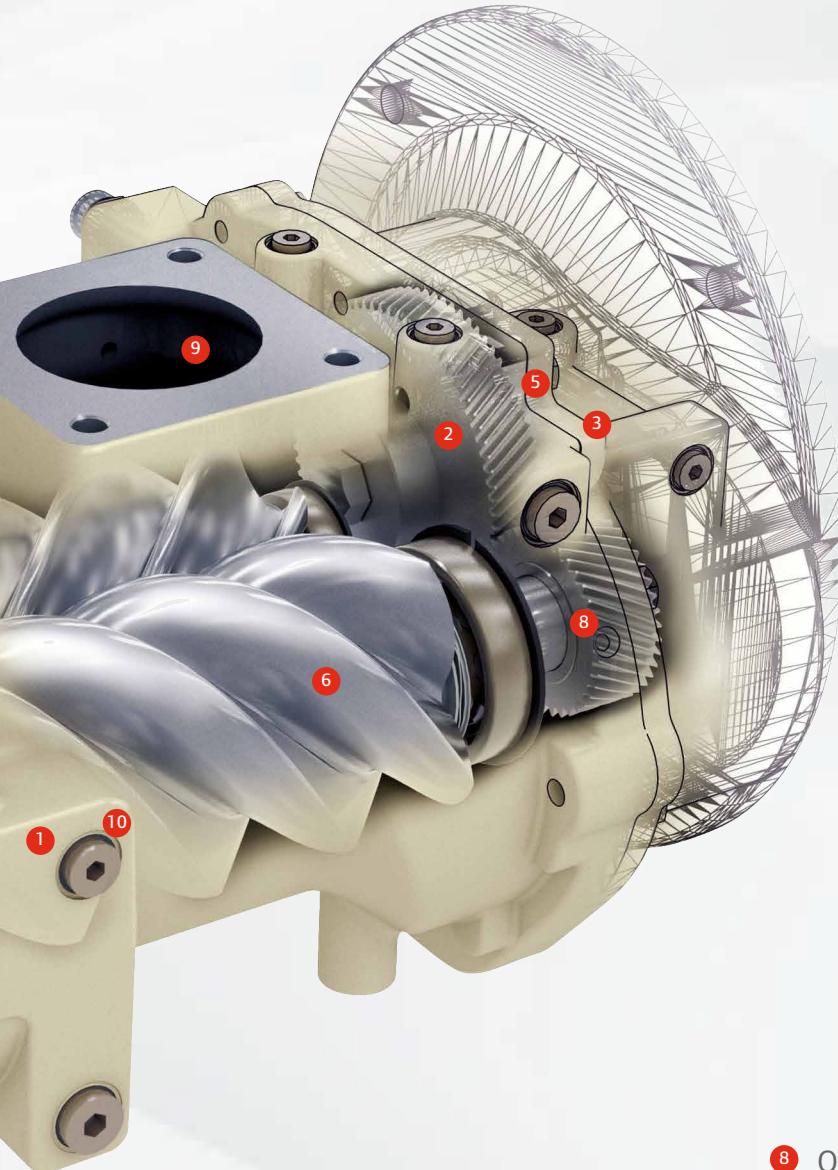

*Please consult the local customer manager for specific energy efficiency.

World-class energy efficiency

Advanced Rotor Profile

➊ Optimised rotor profile helps deliver up to 16% increased efficiency and 34% more airflow, reducing energy cost.

➋ Lower friction bearing arrangements improve energy efficiency.

➌ Optimised gear lubrication increases reliability and reduces power consumption through strategically injecting oil into gear mesh.

➍ Streamlined inlet and outlet flow passage reduces pressure drops.

➎ Optimised oil-injection process lowers temperature and increases efficiency during compression.

Performance

Model	Nominal Power kW-50Hz	Max. Pressure barg-50Hz	Capacity (FAD)* m ³ /min-50Hz	Dimensions(L x W x H) mm-50Hz	Weight kg-50Hz
RM7-11 Standard parameter					
RM7ie_A TAS	7.5	7.5	1.27	970 x 790 x 1000	358
		8.5	1.17		
		10	1.02		
		12.5	0.81		
		14	0.73		
RM11ie_A TAS	11	7.5	1.93	1280 x 841 x 1613	358
		8.5	1.81		
		10	1.56		
		12.5	1.32		
		14	1.21		
RM7ne_A	7.5	8.5	0.6-1.36	970 x 719 x 995	203
		14	0.3-1.07		240
		8.5	0.6-1.96		351
		14	0.5-1.6		388
RM11ne_A	11	8.5	0.6-1.96	1280 x 770 x 1603	209
		14	0.5-1.6		246
		8.5	0.6-1.96		357
		14	0.5-1.6		394
RM15-22 Standard parameter					
RM15ie_A	15	7.5	2.9	1400 x 826 x 1275	549
		8.5	2.7		628
		10	2.4		
		14	1.7		
RM18ie_A	18.5	7.5	3.5	1850 x 826 x 1275	604
		8.5	3.3		683
		10	2.95		
		14	2.2		
RM22ie_A	22	7.5	4.1	1100 x 826 x 1275	619
		8.5	3.9		698
		10	3.5		
		14	2.7		
RM15ne_A	15	10	1.3-3.0	1850 x 826 x 1275	366
		14	1.3-2.0		487
RM18ne_A	18.5	10	1.3-3.7	1100 x 826 x 1275	366
		14	1.3-2.6		487
RM22ne_A	22	10	1.3-4.4	1850 x 826 x 1275	376
		14	1.3-3.1		497

1. Displacement (FAD*)(volume flow) is the operating parameter of the complete, measured according to the test standard of ISO1217:2009 Appendix C.

Performance

Model	Nominal Power kW-50Hz	Max. Pressure barg-50Hz	Capacity (FAD)* m³/min-50Hz	Dimensions(L x W x H) mm-50Hz	Weight kg-50Hz
RM30-45 Standard parameter					
RM30ie_A	30	7.5	5.6	1544 x 884 x 1376	795
		8.5	5.3		
		10	4.6		1008
		14	3.6		
RM37ie_A	37	7.5	7.0	2200 x 884 x 1376	860
		8.5	6.5		
		10	5.65		1073
		14	4.6		
RM45ie_A	45	7.5	8.4	1544 x 884 x 1376	930
		8.5	7.9		
		10	7.0		1125
		14	5.7		
RM30n_A / TAS	30	10	1.2-5.6	1544 x 884 x 1376	651 / 863
RM37n_A	37	10	2.1-7.0	2200 x 884 x 1376	682 / 894
		14	1.9-5.1		694 / 906
RM45n_A	45	10	2.1-8.5	1544 x 884 x 1376	692 / 905
		14	1.9-6.0		694 / 907
RM55-75 Standard parameter					
RM55i_A	55	7.5	10.3	1832 x 1249 x 1512	1233
		8.5	9.8		
		10	8.4		1350
		12.5	7.5		
RM55ie_A	55	7.5	12.0	1832 x 1249 x 1512	1554
		8.5	11.0		
		10	9.9		
		12.5	8.8		
RM75i_A	75	7.5	12.8	1832 x 1249 x 1512	1302
		8.5	12.4		
		10	11.3		1419
		12.5	10.2		
RM75ie_A	75	7.5	14	1832 x 1249 x 1512	1623
		8.5	13.5		
		10	12.5		1740
		12.5	10.5		
RM55n_A	55	10	2.9-10.2	1832 x 1249 x 1512	978
		14	1.8-7.6		
RM55ne_A	55	10	4.5-12.2	1832 x 1249 x 1512	1204
		14	4.4-8.5		
RM75n_A / W	75	10	2.3-12.6	1832 x 1249 x 1512	1018 / 1135
RM75ne_A / W	75	10	4.5-15.4		1291 / 1328

Configuration

Standard Configuration Category	Description	Fixed Speed i/ie	Variable Speed n/ne
Airend	Airend with superior performance	●	●
	Energy-saving controller, with Chinese / English bilingual text display	●	●
	Programmable start-stop operation and remote connection	●	●
Controller	Built-in sequential controller program for at most 4 units*	●	●
	Standard Modbus RTU protocol, RS485 interface	●	●
	Power outage restart option (PORO)*	●	●
Active adaptive protection (PAC™)	Monitor the maintenance of filter element and other wear parts, and adjust system operating parameters accordingly	●	●
	Real-time electronic maintenance indicator & shutdown protection	●	●
Cooling system	High efficient energy-saving fan with low noise	●	●
V-Shield™ technology	Vibration isolating pad & high-class flexible metal conduit	●	●
	Reusable air-tight fluorinated sealing materials	●	●
Supporting system	Noise-reducing housing of the unit	●	●
	Drip-proof base frame (30-75kW)	○	●
	Long-life filter element and separator element	●	●
	Full-load / no-load flow regulation system control	●	\
	Variable frequency PID regulation control	\	●
Main motor & electrical system	Star-delta reduced voltage starter	●	\
	Variable frequency reduced voltage start	\	●
	High-efficiency IP55, TEFC closed IE4 motor with Class B temperature rise & Class F insulation	●	\
	Permanent magnet variable frequency TEFC, IP66, IE5 motor – Class B temperature rise, Class H insulation	\	●
General configurations	Simple single inlet-outlet line (single inlet and single outlet)	●	●
	12 months' warranty program	●	●
Protection under harsh ambient conditions	High temperature options*	○	\
	High dust inlet air filter	○	○
	272/500/750 L skid-mounted air storage reservoir (15-22kW)	○	○
Environmental protection options	Food grade coolant Ultra FG	○	○

● Standard

○ Optional

\ Not applicable

* There are slight differences between different product configurations. Please contact Ingersoll Rand's local customer consultants for details.

Air Treatment

Moisture and contamination in compressed air cause significant problems in equipment operation, such as rust, scale and clogged orifices that result in product damage or costly shutdowns. Making our air treatment equipment an integral component of your compressed air system will improve productivity, system efficiency and product or process quality.

Refrigerated dryer

Our cost-effective refrigerated dryers provide clean, dry air for most industrial applications. You choose different circulation dryers to reduce energy consumption, or choose non-circulation dryers to reduce initial costs.

Features of refrigerated dryer

- Dew point as low as 3°C (38°F), in compliance with ISO Grade-4 requirements
- Non-corrosive heat exchanger design to achieve reliable operation
- Intuitive microprocessor control to simplify operation
- Compact design for easy maintenance



D-INRi series refrigerated dryers



D-ILRi/IERi heatless / micro-heat regenerative desiccant dryers

Desiccant dryer

When the dew point requirement is very low, it is necessary to choose desiccant dryers to provide high-quality air and prevent possible freezing. Depending on your different needs to reduce initial investment cost or reduce energy cost, you can choose from compression heating, no heating, external heating or blast heating desiccant dryer.

Features of desiccant dryer

- Reliable -40°C pressure dew point under most operating conditions
- High-strength desiccant and durable valve
- Low pressure-drop design saves energy
- Advanced microprocessor control, easy to use and maximizing the extension of service time

F-series pipeline filter

Our advanced compressed air filter reduces the pollution in the air flow, which helps protect the finished products, key technologies and valuable equipment.

Features of F-series pipeline filter

Grade G - General Protective Filter

- Grade 2 solid particulate filtration / Grade 2 oil filtration
- Filtration of solid particulates at 0.1 micron

Grade A - Activated Carbon Filter

- Grade 1 oil filtration
- Removal of oil mist and hydrocarbons

Grade H - High Efficiency Precision Filter

- Grade 1 solid particulate filtration / Grade 1 oil filtration
- Filtration of solid particulates at 0.01 micron

Grade D - Dust Filter

- Grade 3 solid particulate filtration
- Filtration of solid particulates at 1 micron



F-series pipeline filter

Luminance Controller

With powerful control and remote management capability, new generation Luminance controller of Ingersoll Rand guarantees steady operation and also greatly improves operating and management efficiency of your unit.



More User-friendly Interface

- High-resolution touch screen: Le-180, 7.0"; Le-120, 4.3"
- More intuitive key parameter & information display



More Advanced Algorithm

- Advanced controller algorithm for smaller pressure fluctuation and lower energy consumption
- Sequencer for up to 4 compressors with Luminance and no other system controllers



More Efficient Management

- Built-in Internet connection for efficient remote management of operating status and maintenance schedule of the unit
- Automatic alarm & fault reminder and performance report sending



Easier Upgrade

- Modular design for easier iterative upgrade of software functions and continuous improvement of user experience



Stadier Performance

- Fully isolated design with stronger anti-interference capability and better electromagnetic compatibility
- Used in a variety of operating ambient conditions and operating life of at least 40,000 hours for 5 years



Stronger Core

- Multi-core processor for significant improvement of computing speed and communication capability
- Significantly reduce data collection and operation interface delay for more timely communication

What is Helix™?

Ingersoll Rand Helix™ Connected Platform aims to maximize the uptime and easily enable the owner's real-time compressed air system data management. The advanced sensor technology integrated in the compressor regularly sends data to our cloud platform, which can be accessed by you from PC, tablet PC or smartphone to learn machine operating condition at any time. We provide layered services for you to choose the required data monitoring and analysis level based on your specific operation demand.



Shorter Planned Stop

Better machine performance



Visualized Equipment Statistics

All units under control



Timely Maintenance

Extended service life of the unit



24-hour Operation State Monitoring

Higher productivity and mechanical efficiency



Lower Shutdown Risk

Minimum unscheduled downtime



Quick Response Services

Better & professional insights

Service Contract



PackageCARE™

PackageCARE: when the agreement becomes effective, all operating risks transfer from you to us to free you from any concerns.
You will enjoy 100% operating risk transfer for any machine model and life.



PlannedCARE™

PlannedCARE: all-round genuine spare parts and maintenance services
You will enjoy preventative diagnosis, current state analysis & trend judgment; 10 years' airen'd warranty (for new oil-flooded rotary screw air compressor)



PartsCARE™

PartsCARE: genuine spare parts for daily maintenance
You will enjoy regular shipment of spare parts and daily maintenance reminder, 5 years' airen'd warranty (for new oil-flooded rotary screw air compressor)

Peace of Mind



+



+



+



=



Lower TCO

CARE service programs provide the most cost-effective solutions based on your customized maintenance strategy.

Quality Results

Ingersoll Rand factory-trained service technicians are backed by more than 160 years of industry experience.

Increased Uptime

Our CARE programs help decrease unplanned downtime and costly production interruptions.

Efficient Energy Use

Peak system efficiency is achieved through properly performed maintenance and inspection.

Peace of Mind

Our world-class services will help you achieve the results you need, while you focus on what's important to your business,

Service and Maintenance Kits

Maintenance cycle: 2000 hours /4000 hours /8000 hours

The service kit contains all the parts needed for a service maintenance

Reliability: constant air quality guarantee with genuine spare parts

Scheduling: regular maintenance & care as planned to decrease failure probability and increase operating stability

Efficiency: one chart No. replacing a number of spare parts lists to increase procurement & management efficiency

Comprehensiveness: all parts and components required for maintenance or service at a time are included for shorter lead time than individual parts

Economy: visual service cost budget and superiority in price to purchase of individual parts



One-stop service with OEM quality guarantee



Ingersoll Rand Inc. (NYSE:IR), driven by an entrepreneurial spirit and ownership mindset, is dedicated to Making Life Better for our employees, customers, shareholders, and planet. Customers lean on us for exceptional performance and durability in mission-critical flow creation and industrial solutions. Supported by over 80+ respected brands, our products and services excel in very complex and harsh conditions. Our employees develop customers for life through their daily commitment to expertise, productivity, and efficiency. For more information, visit www.IRCO.com.



Contact Ingersoll Rand

Add.: F11, L'Avenue, 99 Xianxia Road, Shanghai

Tel.: 021-2221 6000

Website: www.ingersollrand.com

24-Hour Free Service Hotline

800 820 2128

400 820 2128